

Compliant to $UL\ 325$

LEPUS BOX


POWERFUL COMMERCIAL SLIDING OPERATOR FOR GATE UP TO 1200 LBS - 40 FEET.





The reliability of the motor reducer in oil bath

- Powerful commercial sliding operator for gate up to 1200 lbs - 40 feet.
- It is provided of mechanical clutch for a sensitive regulation of the motor torque.
- Polietilene case.
- The oil lubrification of all mechanical gears and electric motor grants a long last and the best performance in heavy duty applications.
- Buzzer alarm.
- Slow down in opening/closing.
- Reverse on obstacle.
- Innovative adjustment Limit Switch with screws.
- Ball bearing wheels.
- Master/Slave pre-wired control board.
- Yellow zinc metal chassis for many years lasting.
- Control board: PRE-GATE 2 with plug-in loop detector.
- Easy and secure manual release from the steel front door.

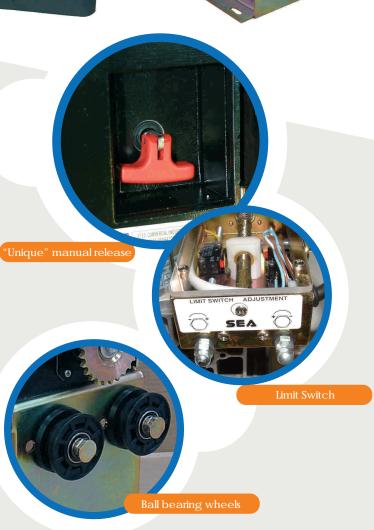




LEPUS BOX

115Vac+5% 50-60Hz Supply Voltage 3.1 A Motor Current 90% Duty cycles Operating temperature from -31°F to +131°F Operator Weight 95 Pounds 1200 Pounds Max gate weight Max gate lenght 40 Feet Opening time 13 inc/sec. IP55 Protection class

CONTROL BOARDS Specifications

- Management of a 115 Vac motor
- Automatic closing Free exit loop management plug-in
- Safety loop management plug-in
- Self-learning operating time Limit switch management
- **Encoder management**
- Select closing to left or right Loop detection plug-in (3) management
- Slave board for second motor management
- Fire switch / telephon entry management
- Courtesy light
- Magnetic / solenoid lock management Back-up battery management
- Contact against intrusion management
- Self-test on photocells
- Alarm input/output
- Dip-Switch for SLAVE configuration





ACCESSORIES

Loop Detectors / Photocells / Key Pads / Card Readers / Transmitters & Receivers / Telephone Entry Systems / Intercom Systems

